

Figure 1

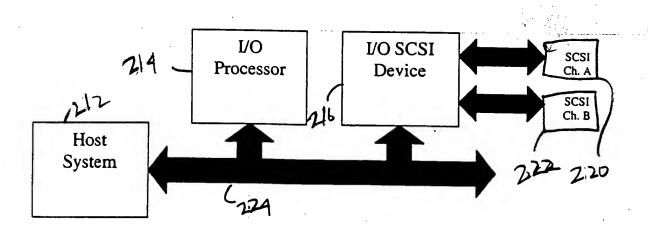


Figure 3.

Initiate Bus Transaction by First Processor to Configure First Device Function Initiate Bus Trunsaction by First Processon to Configure a Second Device Initiate Bus Transaction by First Processor to Conceal Device Function Initiate Bus Transaction by Second Processor to Configure Second Function

Figure 2